

 loopwheels extreme

Get out! Get dirty! Roll your way!

Extreme comfort
Extreme stability
Extreme freedom

loopwheels.com



loopwheels extreme

Go faster and explore further on uneven ground with the proven **lowest levels of vibration.**

Safe levels of whole body vibration for over 2 hours every day.

ISO SAFETY MEASURES 2631-1 1985

This measures the exposure to vibration in a seated position, before action is needed to protect health.

ATV (average daily use) tested at 12km/h over uneven surfaces

| | |
|-------------------------------|--|
| Spinergy 24" day chair wheel | safe for 1 hour 3 minutes |
| Softwheel 24" day chair wheel | safe for 1 hour 18 minutes (+24%) |
| Loopwheels Extreme | safe for 2 hours 10 minutes (+106%) |

Loopwheels Extreme is safe for over **TWICE THE TIME** vs a Spinergy wheel on off-road surfaces at an average of 12km/h.

PRODUCT SPECIFICATION

Wheel size: 24" (507mm)

ETRTO number: 47-507 (24x1.75)

Axle bearing: 1/2" (12.7mm) and 12mm

Spring/loop materials: Ultra lightweight carbon fibre

Rim: Double-walled aluminium, black

Inner rim width: 16mm


Hub: Machined, black anodised aluminium

Bearing width at faces: 1.8" (45.8mm)

Wheel weight: 1.36kg (3lb)

NB Wheel weights without push rim, tyre, or axle

Maximum load (user and chair): 120kg (265lb)

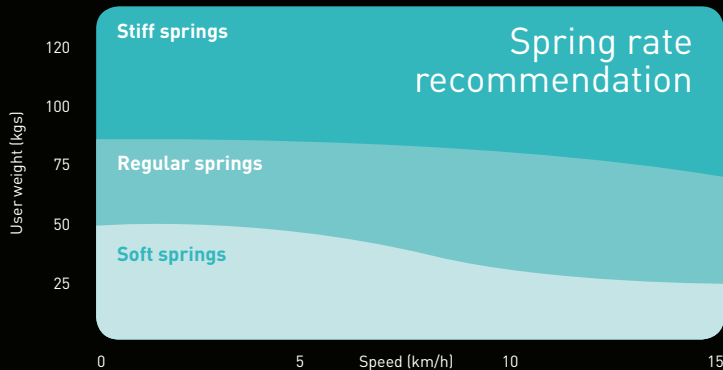

Loopwheels Extreme is available in 3 spring strengths – **Soft springs**, **Regular springs** and **Stiff springs**. Use the chart above to estimate the most usual higher speed on the wheels and the fully-loaded weight of the chair.

Jelly Products Ltd

Unit 202 Boughton Industrial Estate North,
Newark, Nottinghamshire NG22 9LD

T: +44 (0) 1623 860909

E: info@loopwheels.com

W: loopwheels.com

To learn how Loopwheels can make the difference, visit loopwheels.com