



**FEAL**  
...improving life

**iRAMP Vehicle**





# Meet the new iRamp Vehicle

Design isn't only what is seen by the naked eye. For us, design is just as much about understanding the customer's needs and finding solutions for everyday use. Solutions that make it easier to live, travel and work. Our products are always simple and stylish, using durable materials that blend in well in all types of environments.

Our inspiration comes from designing a quality product, with a simple, minimalist design whilst functional for our customers to use.

## Surface Options

Our transport and tailboard ramps have a unique surface treatment that provides excellent grip and makes loading and unloading simple and safe. The perforations in the mesh let through snow, rain and dirt allowing good rear view visibility in the vehicle, as well as keeping the inside of your vehicle as clean as possible. The ramps can be ordered with three different surfaces, standard mesh, tight mesh or with checker plate and mesh combination on the platform.



**STANDARD MESH**



**TIGHT MESH**



**CHECKER PLATES ON SIDE**



Our patented articulated top transit plate adjusts to any height to avoid ledges or bumps allowing for a smoother transition in and out of the vehicle.



Seamless transition on and off the ramp through our newly developed upper and lower transition plate.






Non-lubricated joints for hassle free maintenance.



Wheels on all two-piece ramps for easier folding/unfolding.

# Technical Information

## 2-piece

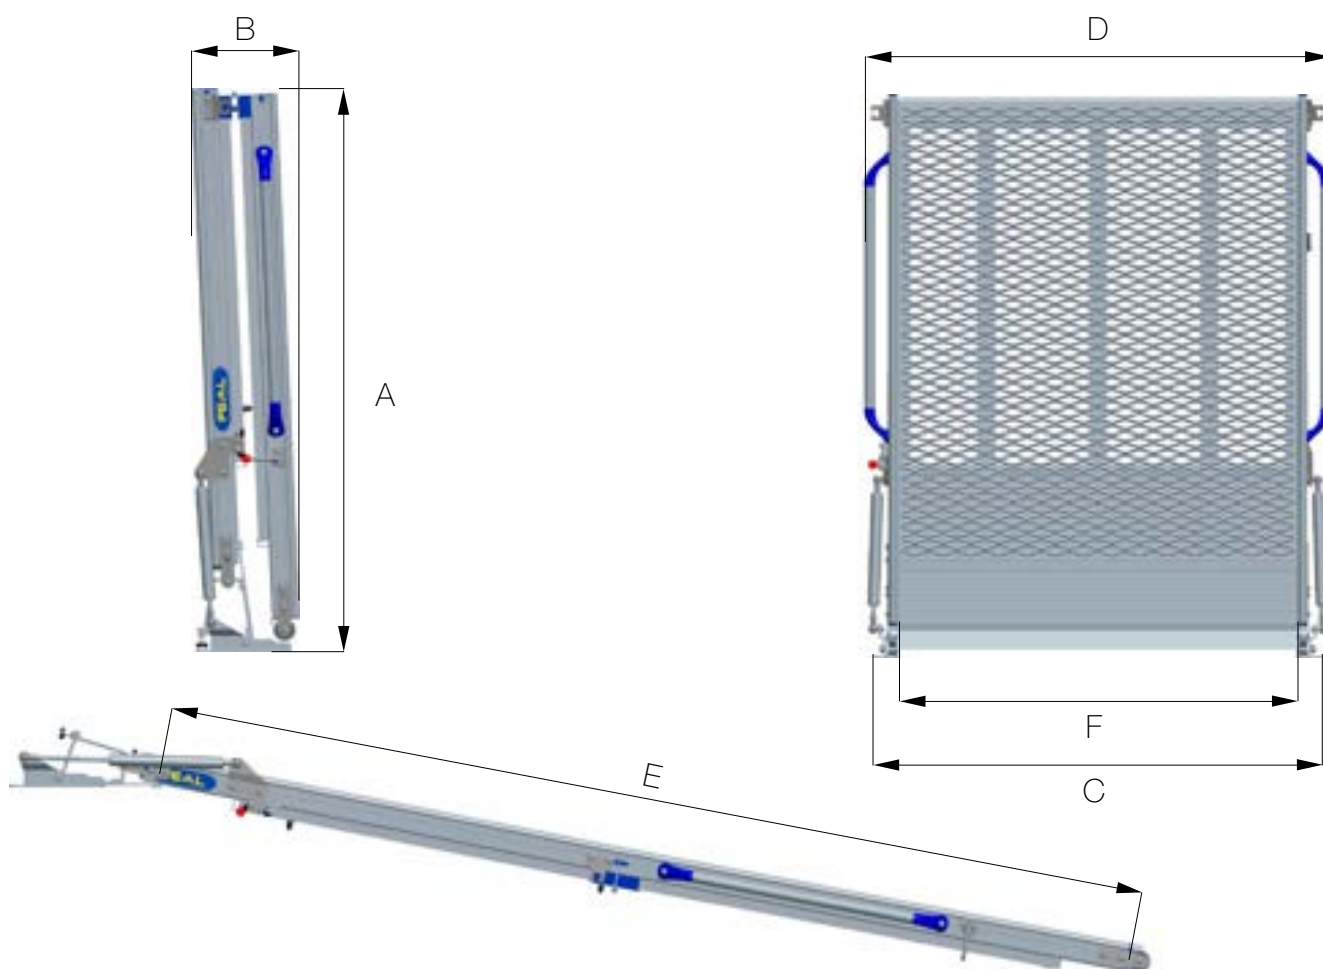


Article number	Height folded (A)	Depth (B)	Outside width base (C)	Outside width ramp (D)	Platform length (E)	Platform width (F)	Loading capacity/SWL
IRV162	961	241	1027	1045	1600	900	400
IRV182	1061	241	1027	1045	1800	900	400
IRV202	1161	241	1027	1045	2000	900	400
IRV222	1261	241	1027	1045	2200	900	400
IRV242	1361	241	1027	1045	2400	900	400
IRV262	1461	241	1027	1045	2600	900	400
IRV282	1561	241	1027	1045	2800	900	400
IRV162-820	961	241	947	965	1600	820	400
IRV182-820	1061	241	947	965	1800	820	400
IRV202-820	1161	241	947	965	2000	820	400
IRV222-820	1261	241	947	965	2200	820	400
IRV242-820	1361	241	947	965	2400	820	400
IRV262-820	1461	241	947	965	2600	820	400
IRV282-820	1561	241	947	965	2800	820	400

All measurements in mm and kg

# Technical Information

## 3-piece

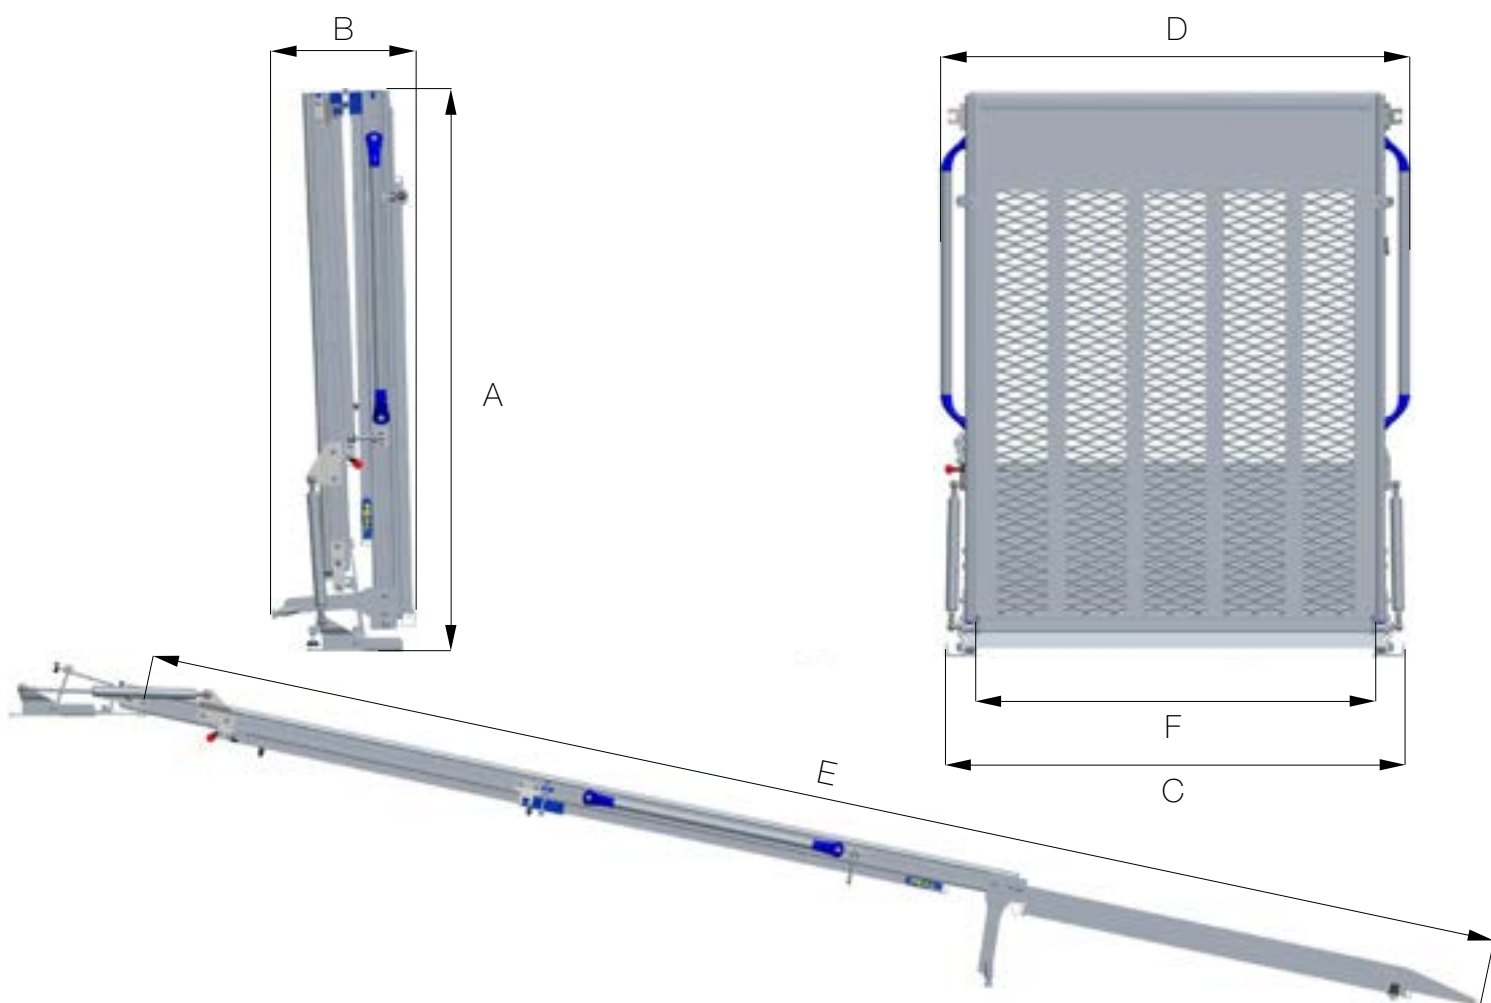

Article number	Height folded (A)	Depth (B)	Outside width base (C)	Outside width ramp (D)	Platform length (E)	Platform width (F)	Loading capacity/SWL
IRV253	961	320	1027	1045	2485	900	400
IRV283	1061	320	1027	1045	2785	900	400
IRV313	1161	320	1027	1045	3085	900	400
IRV343	1261	320	1027	1045	3385	900	400
IRV373	1361	320	1027	1045	3685	900	400
IRV403	1461	320	1027	1045	3985	900	400
IRV433	1561	320	1027	1045	4285	900	400
IRV253-820	961	320	947	965	2485	820	400
IRV283-820	1061	320	947	965	2785	820	400
IRV313-820	1161	320	947	965	3085	820	400
IRV343-820	1261	320	947	965	3385	820	400
IRV373-820	1361	320	947	965	3685	820	400
IRV403-820	1461	320	947	965	3985	820	400
IRV433-820	1561	320	947	965	4285	820	400

All measurements in mm and kg



# Crash tested for your safety

For your safety, the new iRamp Vehicle is designed and tested according to UN-Regulation No.17. The ramp and its fixations successfully withstood the load of a 20G (30ms) deceleration sled test.

"For us there was no alternative. Of course, the ramp would be tested!  
We feel safe. We have developed a ramp that can handle a crash."

- Björne Stjernsten, Developer of iRamp Vehicle



**FEAL**  
...improving life