

Standard and Bariatric Sizes - Height Adjustable

✓ AS/NZS 3973:2009 Certified

✓ TGA 191619 Certified

✓ Juvo Registered Design

✓ SWL 200 & 300kg



Removable backrest

Non-woven comfort design backstraps providing four point access for hygiene

Swing-away arms, height adjustable

Locking safety arms for user security

SWL etched on plate

Soft removable Polyurethane seat, left or right indent open or closed front

Integral pan carrier glides

Height adjustable seat, 6 settings at 26mm increments

Juvo registered design "TearSafe" Swing-away footrests with calf pads as standard

Stainless steel total locking castors 125mm diameter for easy manoeuvrability

See Accessories Section on Page 40 for a full range of self fit modifications for extra client care

Features & Benefits

Hygiene

- Assists transportation of patient for showering and toileting
- Clear rear open space enabling positioning over the toilet
- Easy access for hygiene with open armrest design
- Deeper access front trough design for easy cleaning
- Integral pan carrier glides. Back saver design, assists with emptying the bowl, can be removed half way, self-supporting while the bowl/pan is removed

Design & Modifications

- Grade 304 stainless steel heavy wall thickness tubing forming robust frame
- Durable design to withstand extensive wet area use
- Open armrest design meaning smaller commode can be used in tight spaces while allowing for natural hip and thigh prominence
- Reinforced seat/back frame and armrests – weight bearing
- Removable backrest design to enable alternatives such as a wheelchair style backrest or a range of back rest heights
- Stylish sturdy base to give confidence to client and carer
- Detachable actuator release handle enabling carer to stand either side of client when reclining for extra care and controlled release

Positioning & Comfort

- Stainless steel 125mm total locking castors for effortless manoeuvring
- Minimal overall dimensions to frame to assist with manoeuvrability
- Adjustable seat height for improved client positioning
- Fully adjustable seat tilt to assist with client positioning
- Selection of seamless Polyurethane padded seats & pressure care seats (open or closed fronts)
- Easy removable seat, using Juvo Registered Design "Klipps" System
- Swing-away independent armrests to assist in side transfer and patient access
- Two position height adjustable armrests
- Locking safety arms provide user security and safety
- Flexible impervious non-woven back straps conforming to client shape for support and comfort. Antibacterial and non-suction designed straps to avoid skin tear when client is wet
- Juvo registered design "TearSafe" Swing-away footrests. No plates or sharps remain when swung away prevents injury to users legs
- Adjustable height footrests to accommodate client leg length



Adjustable seat height for improved client positioning. Six settings at 26mm increments



Fully adjustable seat tilt to assist with client positioning




Serial number and SWL etched on every model for product identification



Swing-away arms to assist in side transfer & patient access, height adjustable



Three side cut-out seat frame design for easy cleaning, allowing for left, right and front cut-out seats without modification.

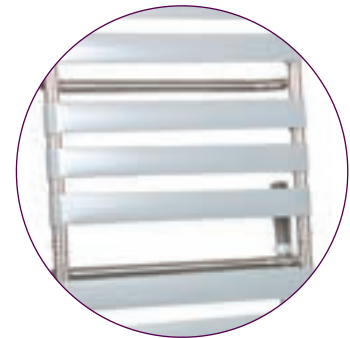

Comfort non-woven back straps for easy hygiene and non-suction design

Specifications

	Standard	Bariatric
Product Code	JH5046	JH5051
Seat Width	460mm	510mm
Width Between Arms	490mm	540mm
Overall Height	1465mm - 1615mm	1465mm - 1615mm
Overall Width	560mm	610mm
Overall Depth	940mm - 1600mm	940mm - 1600mm
Backrest Height	800mm	800mm
Armrest Height - High	240mm	240mm
Armrest Height - Low	200mm	200mm
Seat to Heel	410mm - 575mm	410mm - 575mm
Anterior Seat Height - 6 settings at 26mm increments	510mm - 660mm	510mm - 660mm
Posterior Seat Height - 6 settings at 26mm increments	480mm - 630mm	480mm - 630mm
Toilet Bowl Clearance - Height	450mm - 600mm	450mm - 600mm
Toilet Bowl Clearance - Width	410mm	470mm
Toilet Bowl Clearance - Between Pan Carrier	315mm	315mm
Wall to Rear of Aperture	300mm	300mm
Seat Tilt Angle	-5° to 38°	-5° to 38°
Max User Weight	200kg	300kg